

Double Pole Tie Down System

The double pole tie down system is designed for side console and tiller fishing boats. Once installed accordingly no further adjustment is necessary unless desired.



Step one: Locate the two support pole trees, they will be connected to each other by one strap. Starting from the front, the two loose straps are to be fitted or looped around front cleat(s) or the tip of the bow.

Step two: The remaining two straps coming off the rear support tree are then anchored to the rear of the boat on each side. Adjust the buckle to create a big or small loop in the strap. Again, due to the various boats, several anchoring points may be used. (cleats, transom hooks and even the corners of the hull.)


Step Three: Using the adjustable buckles, adjust each of the straps to create tension pulling against themselves from front to back and side to side. By manipulating the buckles and adjusting the straps, the pole support tree can be maneuvered into your desired locations in the center of the boat.

Step Four: Once location of support trees are in place, install adjustable support poles and adjust to the desired height. Keep in mind not to extend pole to high that it will raise the boat cover to high.

Step Five: After support poles are in place and final tension adjustments are made, the extra strapping may be trimmed if desired.

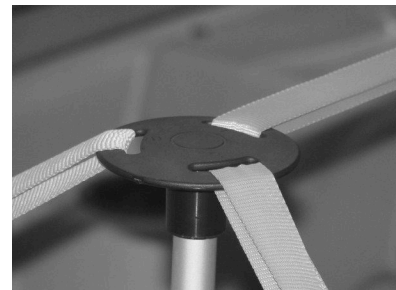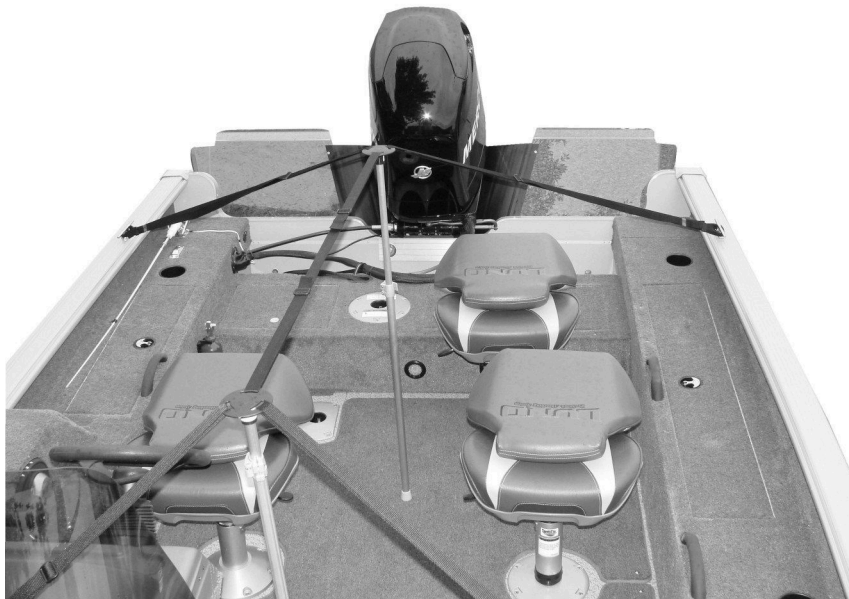

Support Tree

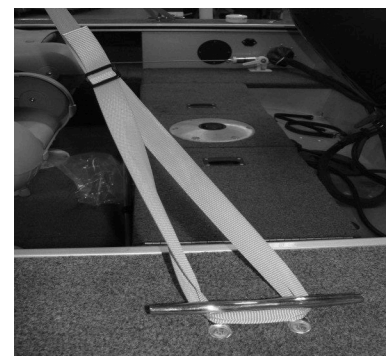

Adjustable Buckles